

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number
WO 01/04870 A1

- (51) International Patent Classification⁷: **G10H 1/12** 48 Egnatias Str., GR-121 37 Athens (GR). FRAGOULIS, Dimitrios [GR/GR]; Damareos 92-94 Str., GR-116 33 Athens (GR).
- (21) International Application Number: PCT/GR00/00024
- (22) International Filing Date: 7 July 2000 (07.07.2000) (74) Common Representative: PAPAODYSEUS, Constantin; 71 Ippokratous Str., GR-106 80 Athens (GR).
- (25) Filing Language: English (81) Designated State (national): US.
- (26) Publication Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (30) Priority Data: 990100235 8 July 1999 (08.07.1999) GR
- (71) Applicants and
(72) Inventors: PAPAODYSEUS, Constantin [GR/GR]; 71 Ippokratous Str., GR-106 80 Athens (GR). TRIANTAFILOU, Constantin [GR/GR]; Asklipiou 157 Str., GR-114 71 Athens (GR). ROUSSOPOULOS, George [GR/GR]; 57, Vosporou Str., GR-104 44 Athens (GR). ALEXIOU, Constantin [GR/GR]; 36 Ioannou Soutsou Str., GR-114 74 Athens (GR). PANAGOPOULOS, Athanasios [GR/GR];
- Published:
— With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF AUTOMATIC RECOGNITION OF MUSICAL COMPOSITIONS AND SOUND SIGNALS.

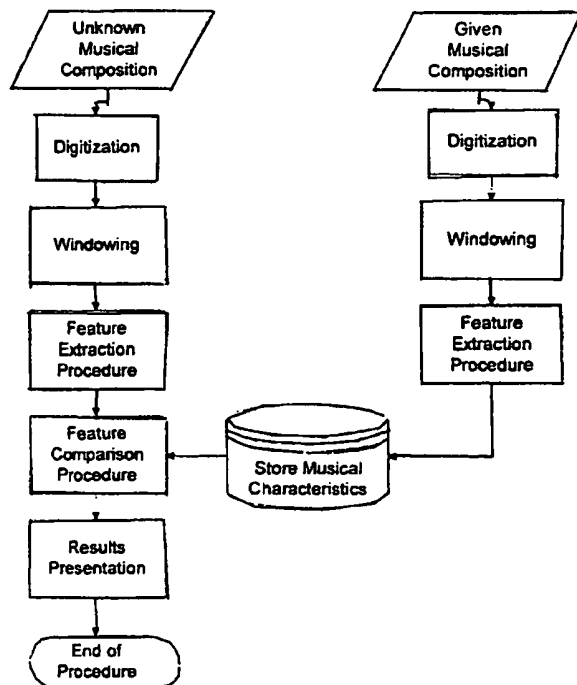

(57) Abstract: The invention refers to a method of automatic recognition of musical compositions and sound signals, which is used for the identification of musical compositions and sound signals played by radio or TV, or performed in public places. According to this invention, there is a selection of a desirably large number of musical compositions and sound signals, which we want to identify. In every one of these signals an original procedure is applied leading to the extraction of a set of characteristics which will finally represent a model signal. Subsequently, for the implementation of the recognition, the unknown musical composition or sound signal is received and digitised. To its digitised version the same procedure of extracting a set of characteristics is applied. These are compared with the corresponding sets of the model signals and with original criteria it is decided if there is a model signal that corresponds to the unknown signal under consideration. Moreover, it is decided which model signal exactly corresponds to the unknown one.



WO 01/04870 A1

Method of Automatic Recognition of Musical Compositions and Sound Signals

5 This invention refers to a method of automatic recognition of musical compositions and sound signals and it is used in order to identify musical compositions and sound signals transmitted by radio, TV and/or performed in public places.

10 During the past, efforts for the development of methods for the automatic recognition of musical compositions and sound signals have been made, that led to the creation of systems performing this task. However, these methods and the related systems manifest low percentage of successful recognition both for the musical compositions and for the sound signals of interest. The introduced method offers much better percentage of fully automatic recognition, higher or equal than ninety eight percent (98%).

15 According to this invention, there is a selection of a desirably high number of musical compositions and sound signals, which we want to identify. For easy reference we will refer to these compositions and signals with the term model signals. In every one of these signals an original procedure is applied leading to the extraction of a set of characteristics which will finally represent each model signal.
20 Subsequently, for the implementation of the recognition, the unknown musical composition or sound signal is received, in which the same procedure of extracting a corresponding set of characteristics is applied. These characteristics are compared with the corresponding sets of characteristics of the model signals and, by means of a number original criteria, it is decided if one (and which one exactly) of the model
25 signals corresponds to the unknown signal under consideration. This procedure is described in figure 1.

It is stressed that, officially, there is no reference in international bibliography for a similar method or a relative system. In the world market there are very few similar systems which offer a percentage of successful recognition less than sixty
30 percent (60%).

The invention is described more thoroughly below:

First, the whole frequency band from 0 to 11025 Hz is divided to sub-bands that are almost exponentially distributed. An implementation of such a division presented in Table 1.

35 According to this implementation, the whole frequency band from 0 to 11025 Hz is divided in 60 sub-bands.

Subsequently, each model signal is digitised with a random sampling frequency F_S preferably greater than or equal to 11025 Hz and a window of 8192 or 16384 or 32768 sample length, slides on the obtained digitised signal. In every such
40 window, an adaptive Fast Fourier Transform is applied and the Discrete Fourier Transform absolute value is obtained. Next, the frequency domain window is divided in sections according to the aforementioned frequency sub-bands choice (see Table 1) and then, in every such section, all the peaks of the absolute value of the Fourier transform are spotted and the greater one is obtained. The value of this peak is
45 called "section representative". Then the L "representatives" with the greater values are spotted, where the value of L may vary from 13 to 30, while the most frequently used L value is 20. The indicators of the sections corresponding to these representatives, sorted in increasing order, form a vector, which constitutes the

“representative-vector” of the window. The above procedure is repeated while the window slides on the whole digitised model signal thus creating all the representative vectors for the specific model signal. Notice that, while the window slides on the model signal, the generated representative vectors often remain
 5 unchanged in two successive windows, successive in the sense that they start in two positions differing one sample the one from the other. For this reason, in every representative vector we assign a number indicating the number of subsequent windows in which the specific vector remained unchanged. For that number we will use the name “number of repetitions” of the representative vector. For the set of the
 10 generated representative vectors of each model signal we will use the name “the model signal set of representatives”. The aforementioned procedure is described in figure 2.

For the identification of the unknown sound signal, which from now on will be called the “unknown signal”, the following procedure is used:

15 A part of the unknown signal of length varying from eight (8) to sixteen (16) seconds is received, digitised and registered, at least temporarily. At the beginning of that unknown signal part a window of length $W_\ell = 8192$ or $W_\ell = 16834$ or $W_\ell = 32768$ samples is obtained; notice that in any case this window will be of the same length with the sliding window which was used for the model signals. In this
 20 window a Fast Fourier Transform is applied and the absolute value of it is obtained. Afterwards, all the peaks of the absolute value of the Fourier transform are spotted and S copies of these peaks are created. For the creation of every copy of the peaks, the positions of the peaks are multiplied with a different coefficient f_i , $i = 0, 1, \dots, S$, which is called “window shift coefficient”. Thus, S+1 different groups of peaks
 25 are created. For every one of these groups the following procedure is realised: the section to which each peak corresponds according to the aforementioned frequency sub-bands division, is spotted (see Table 1). For every section to which at least one peak corresponds, the greater peak is kept. The value of this peak is called “representative of the section of the unknown signal corresponding to the shift
 30 coefficient f_i ”.

Next, the L greater value representatives are spotted, where the value of L is the same with the one used for the model signals. The indicators of the sections corresponding to these representatives, sorted in increasing order, form a vector, which constitutes the “first representative vector of the unknown signal
 35 corresponding to the shift coefficient f_i ”.

Afterwards, the window slides for ℓ_1 samples, where the value of ℓ_1 may vary from $0,55 * F_S$ to $1,9 * F_S$ samples, with most frequently used value the $\ell_1 = 1,4 * F_S$. For the new window position and for every shift coefficient f_i , $i = 0, 1, \dots, S$, (S+1) vectors are computed with the way that described above; each such
 40 vector will be called “second representative vector of the unknown signal corresponding to the shift coefficient f_i ”. The above procedure is repeated for M-2 windows, where each window starts at a sample having a distance of ℓ_i samples from the start of the previous one, $i = 2, 3, \dots, M-1$, where the value of M may fluctuate between 7 and 13 windows, the most usual value being $M = 9$. In this way
 45 S+1 groups of M representative vectors are obtained; for each such group we will

employ the name "group of unknown signal representative vectors corresponding to the shift coefficient f_i ".

It must be stressed that for a specific application the ℓ_i values, $i = 1, 2, \dots, M-1$, are not necessary equal, but must be kept fixed throughout the whole procedure.

5 The exact number $(S+1)$ of the shift coefficients f_i varies from 1 to 15, while their values are given by the formula:

$$f_i = \begin{cases} 1 + \left(\frac{i+1}{2}\right) * STEP, & \text{if } i \text{ odd} \\ 1, & \text{if } i = 0 \quad i = 1, 2, \dots, S, \\ 1 - (i/2) * STEP, & \text{if } i \text{ even} \end{cases}$$

where $STEP$ is a parameter expressing the shift step, that usually belongs to the interval $[0.005, 0.01]$, the more frequently used value being 0.0075. The

10 identification procedure described so far is depicted in figure 3.

For the realisation of the unknown signal recognition, each group of unknown signal representatives is being compared with elements of the set of representatives of each model signal separately. To set ideas, each of the $S+1$ groups of M unknown signal representatives is compared with groups of M model signal representatives by

15 means of the method consisting of the following steps:

E_1) If the first representative vector of one group of the unknown signal is called V_1 and the first representative vector of the of the model signal is called U_1 , then initially, the number of the common elements between these two vectors is calculated. For example, if $L = 20$ and

$$20 \quad V_1 = [60 \ 55 \ 52 \ 49 \ 47 \ 43 \ 39 \ 34 \ 33 \ 30 \ 29 \ 22 \ 20 \ 17 \ 14 \ 11 \ 9 \ 5 \ 2 \ 1]$$

$$U_1 = [60 \ 58 \ 55 \ 49 \ 47 \ 41 \ 39 \ 37 \ 33 \ 30 \ 28 \ 25 \ 20 \ 17 \ 14 \ 11 \ 9 \ 6 \ 4 \ 2]$$

then the number of the common elements is thirteen (13).

25 Subsequently, it is checked if the number of the common elements between the vectors V_1 and U_1 is greater than or equal to the number $0.51 * L$, which is called "requisite similarity threshold". If, indeed, it is greater than or equal to $0.51 * L$, we proceed to step E_2 below. If it is smaller than $0.51 * L$, then we consider that the set of the tests performed so far did not result to a successful recognition, so, after

30 considering U_1 as the next representative-vector of the model signal, we start the comparison procedure again, beginning from the comparison of the vector V_1 with the new U_1 .

E_2) If the second representative vector of the unknown signal, corresponding to the same shift coefficient with V_1 f_i , is called V_2 and the representative vector

35 of the model signal corresponding to the sample $(\ell_1 * f_i)$, is called U_2 , then we calculate the number of the common elements between these two vectors.

Afterwards, we check if the number of the common elements between the vectors V_2 and U_2 is greater than or equal to the "requisite similarity threshold". If it is greater or equal, we proceed to step E_3 below. If it is smaller, then we consider that the set of tests performed so far did not result to a successful recognition, so, after considering U_1 as the next representative-vector of the model signal, the comparison procedure starts again beginning from the comparison of the vector V_1 with the new U_1 .

10

$E_{(M-1)}$ If the $(M-1)$ representative vector of the unknown signal corresponding to the same with V_1 shift coefficient f_i , is called $V_{(M-1)}$ and the representative vector of the model signal corresponding to the sample $\sum_{\mu=1}^{M-2} (\ell_{\mu} * f_i)$ is called

$U_{(M-1)}$, then we calculate the number of the common elements between these two vectors.

Next, we check if the number of the common elements between the vectors $V_{(M-1)}$ and $U_{(M-1)}$ is greater than or equal to the "requisite similarity threshold". If it is greater or equal, we proceed to step E_M below. If it is smaller, then we consider that the set of tests performed so far did not result to a successful recognition, so, after considering U_1 as the next representative-vector of the model signal, the comparison procedure starts again beginning from the comparison of the vector V_1 with the new U_1 .

E_M If the M representative vector of the unknown signal corresponding to the same with V_1 shift coefficient f_i , is called V_M and the representative vector of the model signal corresponding to the sample $\sum_{\mu=1}^{M-1} (\ell_{\mu} * f_i)$ is called U_M , then we

calculate the number of the common elements between these two vectors V_M and U_M and we check if it is greater than or equal to the "requisite similarity threshold". If it is greater or equal, we proceed to step E_{M+1} below. If it is smaller, then we consider that the set of tests performed so far did not result to a successful recognition, so, after considering as U_1 the next representative-vector of the model signal, the checking procedure starts again beginning from the comparison of the vector V_1 with the new U_1 .

E_{M+1} First we check how many of the pairs $(V_1, U_1), (V_2, U_2), \dots, (V_M, U_M)$ have, according to the previous comparisons, a number of common elements in the interval $[0.51 * L, 0.71 * L]$. If the number of these pairs is greater than $0.34 * M$, then we consider that the set of tests performed so far did not result to a

successful recognition, so, after considering U_1 as the next representative-vector of the model signal, the comparison procedure starts again beginning from the comparison of the vector V_1 with the new U_1 . If the number of these pairs is smaller or equal than $0.34 \cdot M$ then the following check is realised:

5 For the pairs of the vectors pairs $(V_1, U_1), (V_2, U_2), \dots, (V_M, U_M)$, having already being compared, we calculate the mean value of the number of the common elements. If this mean value is greater than or equal to $0.71 \cdot L$ then we consider that the comparison between the group of the M representatives of the model signal corresponding to the shift coefficient f_i that we checked and the
10 group of the representatives of the unknown signal, is successful. If the mean value is smaller than $0.71 \cdot L$ then we consider that the set of tests performed so far did not result to a successful recognition, so, after considering as U_1 the next representative-vector of the model signal, the comparison procedure starts again beginning from the comparison of the vector V_1 with the new U_1 .

15 If all possible vectors of the model signal are unsuccessfully compared with one group of representatives of the unknown signal corresponding to the specific shift coefficient f_i , then we repeat the comparison procedure, using the group of representatives of the unknown signal corresponding to the next shift coefficient f_{i+1} . If the comparison of a specific set of model vectors with all $(S+1)$ groups of
20 representatives of the unknown signal is unsuccessful, then we proceed to the comparison of the unknown signal with another set of model vectors.

If the result of the above comparison is successful for a group of the unknown signal corresponding to a specific shift coefficient, let's say f_ε , we proceed to the application of the irrevocable comparison criterion, which will be described below.

25 As it is already mentioned, the successful application of the first aforementioned criterion results to the determination of a group of M representatives of the model signal U_1, U_2, \dots, U_M which "fit" to the group of the representatives of the unknown signal V_1, V_2, \dots, V_M corresponding to the specific shift coefficient f_ε . Since the positions of these vectors in their
30 corresponding signals are now known, it is possible to realise a sequence of comparisons between vectors of the unknown signal, corresponding to the specific shift coefficient f_ε , with the vectors of the model signal formed at the specific positions where the first criterion was satisfied.

In this way, in the digitised unknown signal of duration from eight (8) to
35 sixteen (16) seconds, a window of length W_t is obtained beginning at the unknown signal starting point. In this window a fast Fourier transform is applied again and its absolute value is obtained. Subsequently, the peaks of the Fourier transform are spotted and their positions are multiplied with the shift coefficient f_ε , which has been previously verified that satisfies the first criterion. Then, in each section, the
40 peaks are sorted according to their value. In each section to which at least one peak has been previously ascribed, the greater peak is kept to form the "representative vector of the unknown signal". Next, the L greater value representatives are spotted, where the value of L is the same with the one used in the first criterion. The

indicators of the sections corresponding to these representatives, sorted in increasing order, form a vector that constitutes the "first irrevocable representative-vector of the unknown signal".

Then, the window slides for k_1 samples, where the value of k_1 is equal to
 5 $\frac{\ell_1 * (M - 1)}{D - 1}$. The value of D fluctuates between 30 and 50. For the new window position a new vector is calculated, the same way as it was described before, called "second irrevocable representative-vector of the unknown signal". The above procedure is repeated for over $D-2$ windows, each one starting at a distance of k_i samples from the start of its previous window, where $k_i = \frac{\ell_i * (M - 1)}{D - 1}$, $i = 2, 3,$
 10 ..., $D-1$.

In this way, finally, a group consisting of D representative-vectors is created. We will refer to this group with the name "irrevocable group of representatives of the unknown signal".

In order to obtain the final decision if the unknown signal corresponds to the
 15 model signal in hand, the irrevocable group of representatives of the unknown signal is compared to elements of the set of the representatives of the model signal, by means of a method similar to the first criterion consisting of the steps briefly described below:

T₁) If the first irrevocable representative-vector of the unknown signal is called
 20 V_1^* and U_1^* is called the representative-vector of the model signal corresponding to the position, let's say h_1 , where the first criterion has been satisfied, then initially we calculate the number of the common elements between these two vectors.

T₂) If the second irrevocable representative-vector of the unknown signal is called V_2^* , then this vector is compared with vector U_2^* , which is the representative
 25 vector of the model signal corresponding to the position $h_1 + k_1 * f_\varepsilon$, where f_ε is the shift coefficient that has been calculated from the first criterion.

•
 •
 •
 30 T_(D-1)) If the $(D-1)^{th}$ irrevocable representative-vector of the unknown signal is called $V_{(D-1)}^*$ and the representative-vector of the model signal corresponding to the sample $\sum_{j=1}^{D-2} (k_j * f_\varepsilon)$ is called $U_{(D-1)}^*$, then we calculate the number of the common elements between these two vectors.

Finally, having calculated the number of the common elements between these
 35 D pairs of vectors, in order to decide for the identification, we check if the two conditions stated below are satisfied:

[Condition 1] At least $0.825 * D$ from the pairs of the vectors, have common number of elements greater than $0.71 * L$.

[Condition 2] The total number of the common elements of the vectors, namely the sum of the common elements of the pairs $(V_1^*, U_1^*), (V_2^*, U_2^*), \dots, (V_{(D-1)}^*, U_{(D-1)}^*)$, is greater than $0.6875 * D * L$.

If these two conditions are satisfied, then we have successfully recognised that
5 the specific musical composition corresponds to the model signal in hand.

The whole procedure of the identification is described in the Figures 3, 4 and
5.

Band	Band Frequency Interval (in Hz)	Band	Band Frequency Interval (in Hz)	Band	Band Frequency Interval (in Hz)
0	0 - 50	16	285- 306	32	938 - 1009
1	51- 99	17	307 - 329	33	1010 - 1088
2	100 - 107	18	330 - 355	34	1089 - 1172
3	108 - 116	19	356 - 382	35	1173 - 1263
4	117 - 125	20	383 - 412	36	1264 - 1360
5	126 - 134	21	413 - 444	37	1361 - 1466
6	135 - 145	22	445 - 478	38	1467 - 1579
7	146 - 156	23	479 - 516	39	1580 - 1702
8	157 - 168	24	517 - 556	40	1703 - 1834
9	169 - 181	25	557 - 599	41	1835 - 1976
10	182 - 195	26	600 - 645	42	1977 - 2129
11	196 - 210	27	646 - 695	43	2130 - 2293
12	211 - 227	28	696 - 749	44	2294 - 2471
13	228 - 244	29	750 - 807	45	2472 - 2663
14	245 - 263	30	808 - 869	46	2664 - 2869
15	264 - 284	31	870 - 937	47	2870 - 11025

Table 1

CLAIMS

The method for the automatic recognition of musical compositions and sound signals, which is used for the identification of musical compositions and sound signals played by radio or TV or performed in public places, is based on the existence of a procedure, which is applied to the model signals and results to the extraction of a set of characteristics, which will finally represent each model signal. Besides, it is based on a similar procedure, which applies to the unknown musical composition or sound signal for the extraction of similar characteristics and, finally, it is based on a procedure of comparison performed between the representative sets of characteristics of the model and the unknown signal. This method is characterised by the model sets of characteristics corresponding to division of the frequency domain in bands. It is also characterised by two original criteria for the decision of the identification, according to which, two musical compositions or sound signals are identified only when:

a) A group of M representative vectors of the model signal U_1, U_2, \dots, U_M where two successive vectors are calculated at samples having distance $\ell_i, i = 1, 2, \dots, M-1$, "match" with a group of representatives of the unknown signal V_1, V_2, \dots, V_M , which corresponds to a specific shift coefficient f_ϵ . Notice that, the values of $\ell_i, i = 1, 2, \dots, M-1$, are not necessarily equal, but, in any case, are kept fixed throughout the application. The matching between U_1, U_2, \dots, U_M and V_1, V_2, \dots, V_M is realised by means of the following criterion:

All comparisons between the vectors of the pairs $(V_1, U_1), (V_2, U_2), \dots, (V_M, U_M)$ are made and the number of pairs with common elements in the interval $[0.51 * L, 0.71 * L]$ is computed. If it is greater than $0.34 * M$ then we consider that the set of comparisons performed so far did not result to a successful recognition. If this number is smaller or equal than $0.34 * M$ then it is checked if the mean value of the number of common elements of vectors of the above pairs $(V_1, U_1), (V_2, U_2), \dots, (V_M, U_M)$ is greater than or equal to $0.71 * L$. If it is, then we consider that the comparison between the group of the M representatives, corresponding to the shift coefficient f_ϵ , of the model signal in hand and the group of representatives of the unknown signal is successful.

b) A second group of D irrevocable representative-vectors of the model signal $U_1^*, U_2^*, \dots, U_D^*$ being calculated at a distance k_i the one from its previous, where $k_i = \frac{\ell_i * (M - 1)}{D - 1}, i = 1, 2, \dots, D-1$, which are not necessarily equal, but are, in any case, kept fixed throughout the application, "match" with a group of representatives of the unknown signal $V_1^*, V_2^*, \dots, V_D^*$ which corresponds to a specific shift coefficient f_ϵ , according to the following criterion:

• At least $0.825 * D$ from the pairs of the vectors $(V_1^*, U_1^*), (V_2^*, U_2^*), \dots, (V_{(D-1)}^*, U_{(D-1)}^*)$, have common number of elements greater than $0.71 * L$.

5 • The total number of the common elements of the vectors (namely the one that results from the summation of the common elements of the pairs $(V_1^*, U_1^*), (V_2^*, U_2^*), \dots, (V_{(D-1)}^*, U_{(D-1)}^*)$), is greater than $0.6875 * D * L$.

If both these conditions (a) and (b) are satisfied, then we have successfully recognised the specific musical composition.

1/5

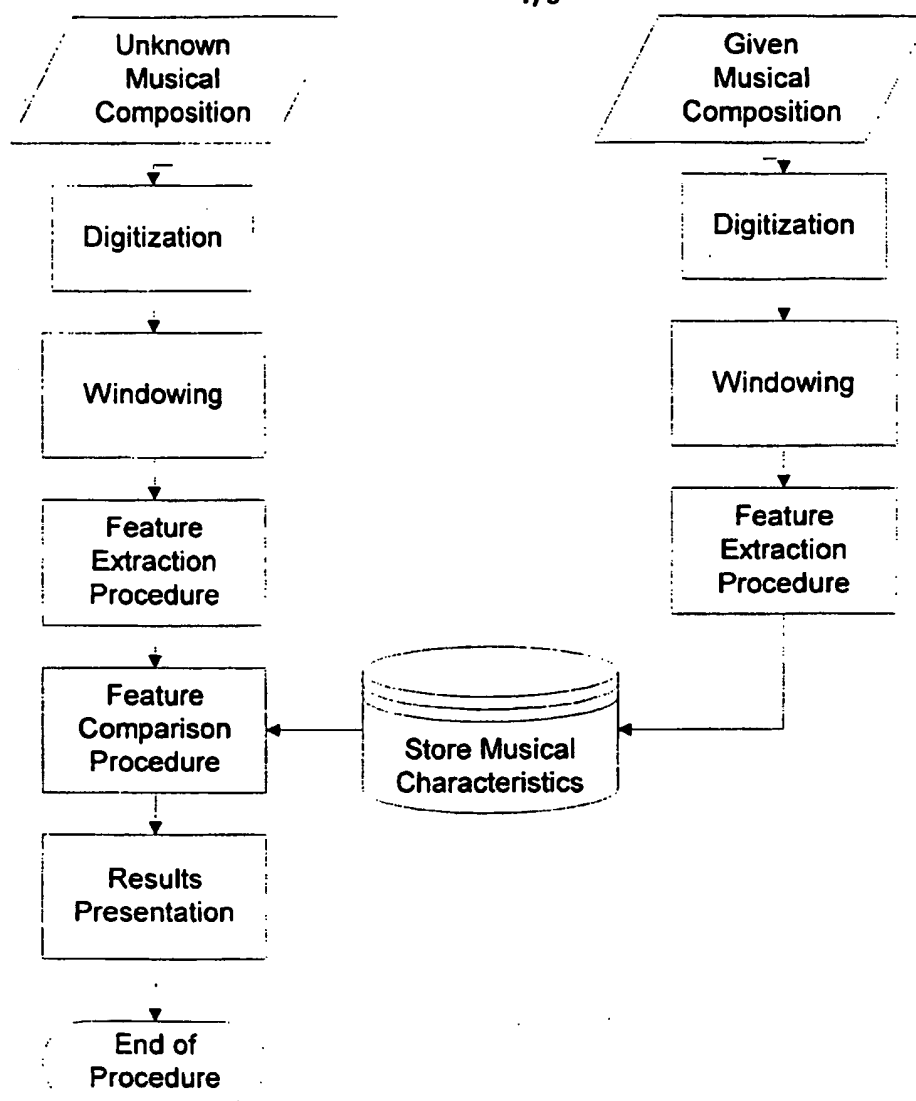


Figure 1

2/5

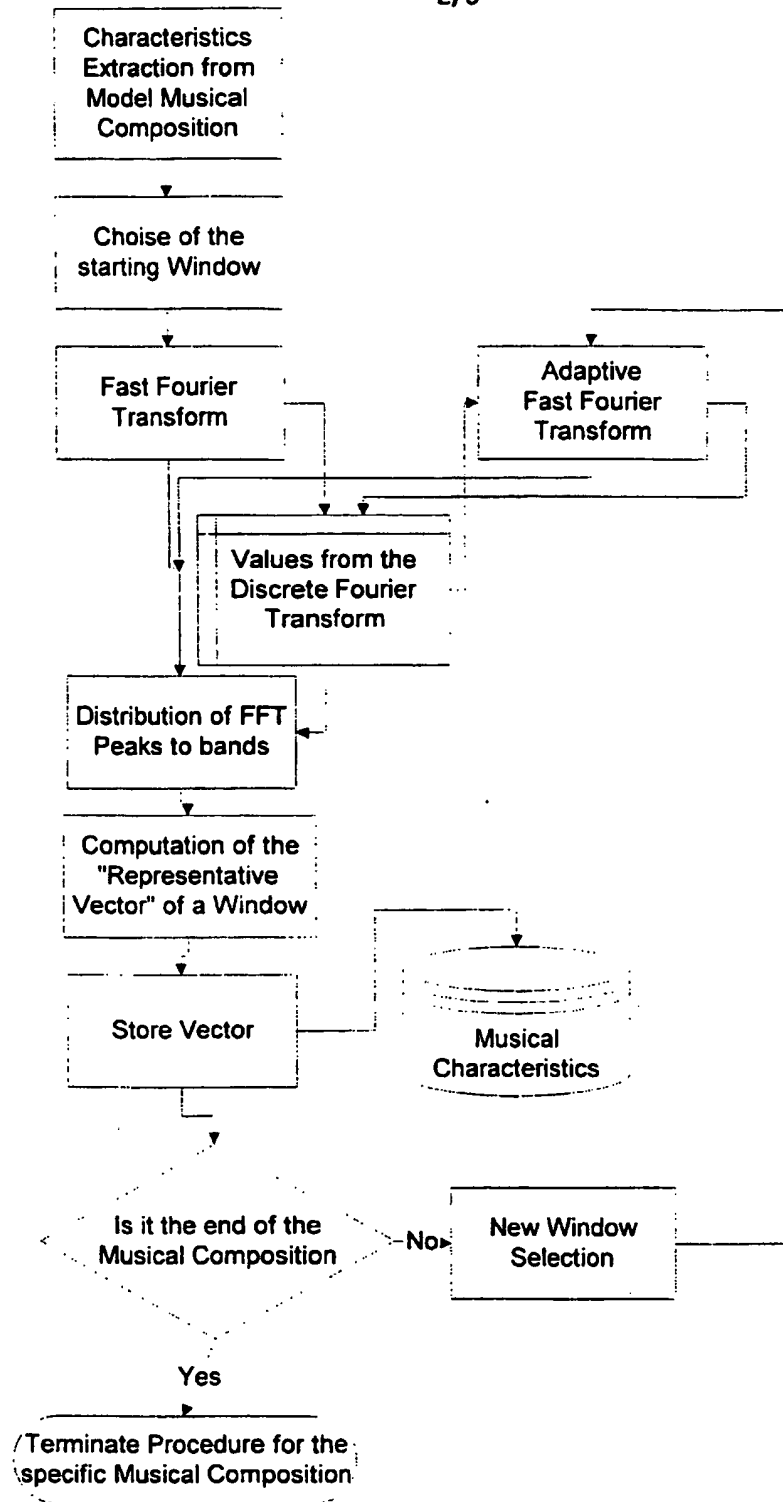


Figure 2

3/5

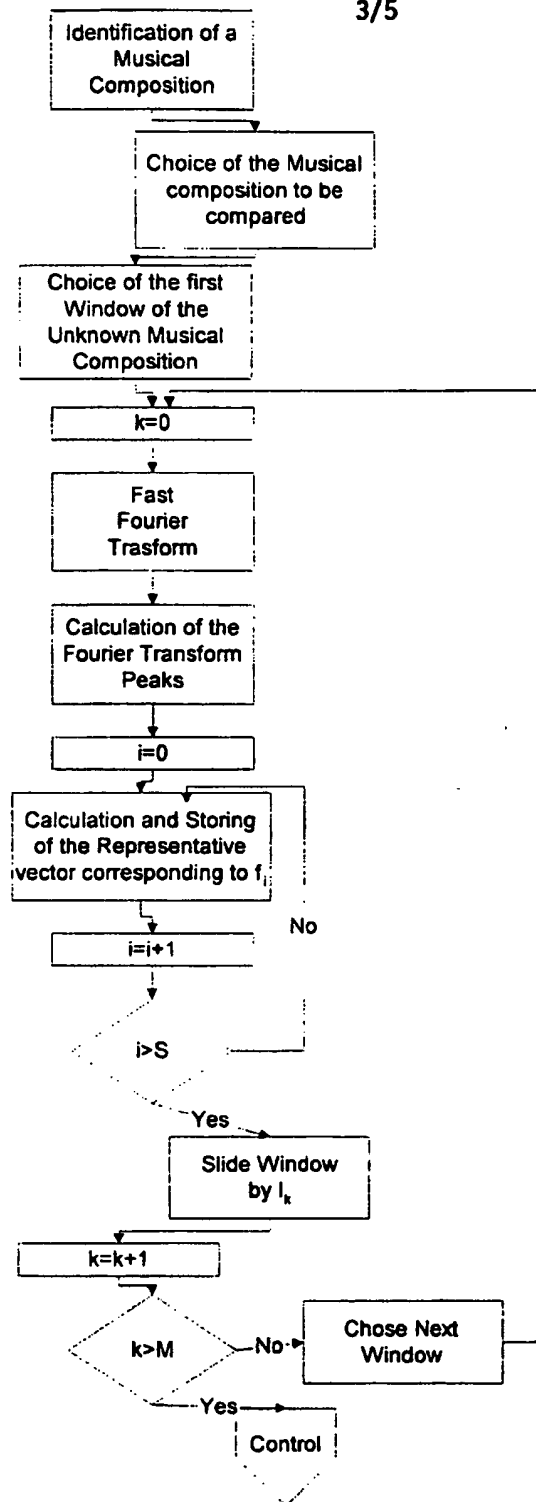


Figure 3

4/5

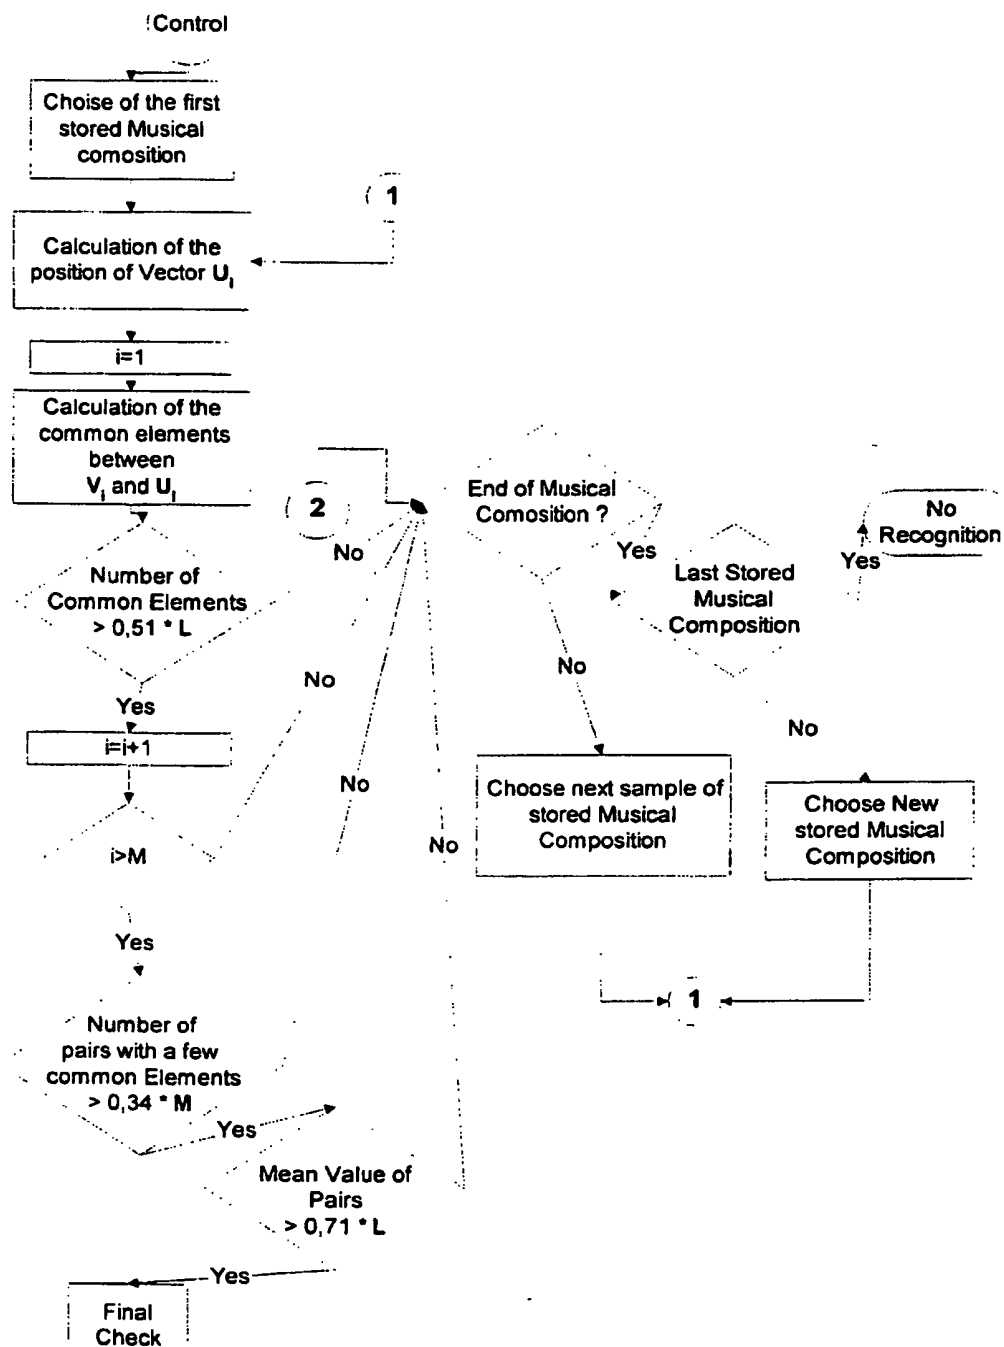


Figure 4

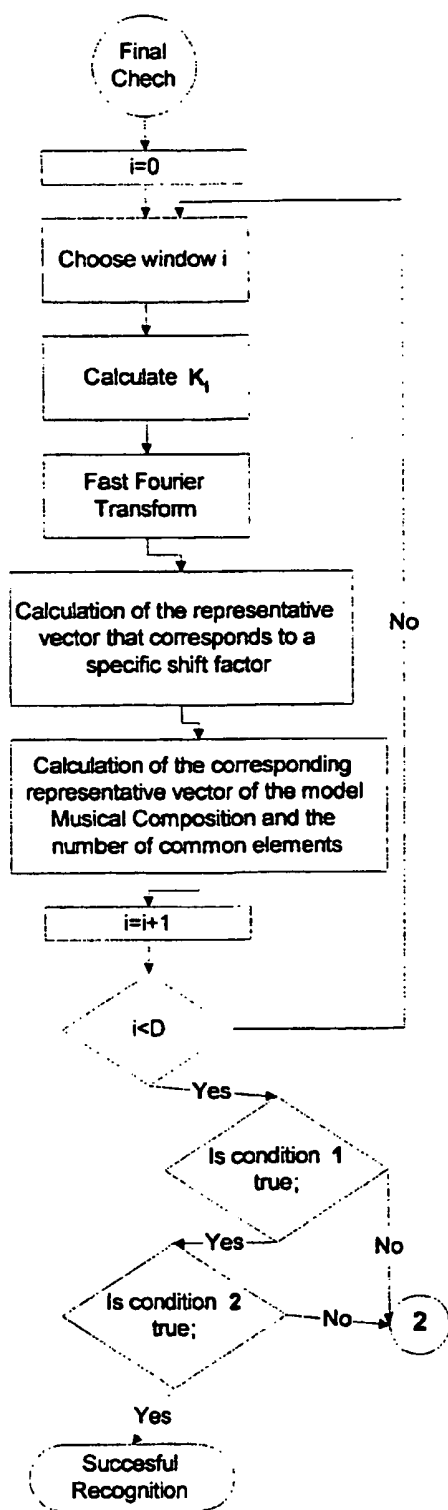


Figure 5

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GR 00/00024

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G10H1/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G10H G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 210 820 A (KENYON STEPHEN C) 11 May 1993 (1993-05-11) column 13, line 29 -column 17, line 58; figures 1,2,5,6	1
A	US 5 874 686 A (GHIAI ASIF U ET AL) 23 February 1999 (1999-02-23) column 1, line 57 -column 2, line 3 column 2, line 27 - line 59 column 4, line 31 -column 6, line 59; figure 1	1
A	US 5 778 335 A (UBALE ANIL WAMANRAO ET AL) 7 July 1998 (1998-07-07) column 3, line 10 -column 6, line 2; figure 1	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 2000

Date of mailing of the international search report

06/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pulluard, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GR 00/00024

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5210820 A	11-05-1993	AT 142815 T	15-09-1996
		CA 2041754 A	03-11-1991
		DE 69122017 D	17-10-1996
		DE 69122017 T	10-04-1997
		EP 0480010 A	15-04-1992
		ES 2091328 T	01-11-1996
		HK 133697 A	24-10-1997
		JP 5501166 T	04-03-1993
		WO 9117540 A	14-11-1991
US 5874686 A	23-02-1999	NONE	
US 5778335 A	07-07-1998	NONE	